


ADVANCE SBU65GT (400V)

Blast Chiller/Freezer



1 / 1 GN



600 x 400 EN

ACCESSORIES INCLUDED

N/A

OPTIONAL ACCESSORIES

N/A

PRODUCT SERIES: ADVANCE SBU

ITEM NUMBER: 975780542

COUNTRY OF ORIGIN: ITALY

ADVANCE SBU65GT (400V 3N-/50Hz) is an HACCP compliant blast chiller/freezer for 1/1 GN and/or EN 600 x 400mm trays (max of 14). Chilling/freezing capacity of 70/38kg. It features a control panel with segment display for simple and fast navigation. Use the preset favourite programs or store your customized cycles. Legs are adjustable 105-155mm.

- Digital control panel with segment display for simple and fast navigation
- Single-point probe for precise core temperature control
- USB port for download of cooling log data
- HACCP alarms. If a power failure occurs or when a temperature limit is exceeded this will activate an audio-visual alarm
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Easy maintenance with access to condenser without use of tools
- Removable wire rack for 1/1 GN and/or EN 600 x 400mm
- Max. Number of pans: 14
- The internal fan section can be opened for cleaning around and behind the unit
- Defrost drip tray position under the cabinet
- Right hand hinged door
- Reversible door
- Removable magnetic door gasket

WARRANTY PERIOD

3 Years on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant: R290 / Refrigerant (kg): 0.3 / CO2 equivalent (kg): 0.9 / GWP: 3

CERTIFICATIONS



Energy consumption - Chilling, kWh/kg (ISO 22042:2021)	Energy Consumption - Freezing, kWh/kg (ISO 22042:2021)
0.08	0.25



HOSHIZAKI

ADVANCE SBU65GT (400V)

TECHNICAL SPECIFICATIONS


Tray size / Shelf size	Max number of trays / shelves	Temperature Range	Power Supply	Connection Load (Watt)	Ref. capacity at -25°C (Watt)	Climate Class	Sound Level – dB(A)	Chilling capacity (from +70°C to +3°C in 90 minutes) (kg)	Freezing capacity (from +70°C to -18°C in 4 hours) (kg)
1/1 GN / 400 x 600mm EN	14	-40/+10°C	400V, 3N-/50 Hz	2,500	2,610	5	64	70	38

Distance between guide positions (mm), GN/EN	Dimensions internal (W x D x H) (mm)	Maximum depth of gastro pans (mm), GN/EN	Height from base to first guide (mm)	Height from ceiling to top guide (mm)
530/600	645 x 702 x 1080	325/400	58	74

SHIPPING SPECIFICATIONS

Dimensions W x D x H (mm)	Dimensions, Packed, W x D x H (mm)	Net Weight (kg)	Weight, Packed (kg)	Volume Packed (m3)
800 x 930.4 x 1954-2004	880 x 990 x 2180	245	270	1.899

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

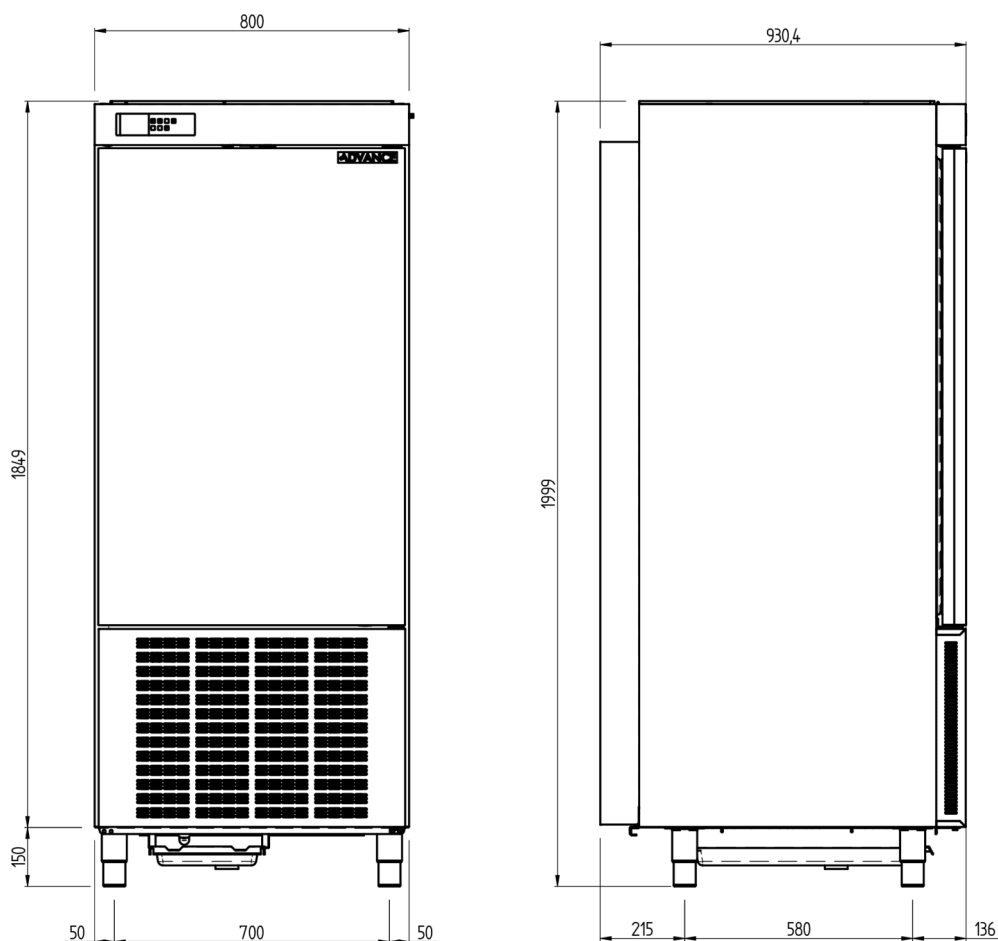

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki.uk