

WALL MOUNTED FREEZER UNIT WHITE 2 GLASS DOORS

Discover our modern wall-mounted freezer unit with 2 glass doors, an excellent solution for storing frozen products in retail environments.



This innovative freezer combines two separate compartments: on top, you'll find a ventilated freezer, while the bottom features a static chest freezer. The ventilated upper freezer ensures efficient air circulation and rapid cooling, while the static cooling in the lower section guarantees reliable and even freezing. The glass doors on the upper freezer provide a clear view of the contents, with all your products conveniently at eye level. Maintenance is simplified thanks to the automatic defrost system. The energy-efficient LED lighting beautifully showcases your products, and the design fits seamlessly into any modern space. Dimensions: 1454x890x2110 mm (LxDxH) – power consumption: 1.15 kW – capacity: 373 / 575 liters – temperature: -18°C – weight: 298 kg.

Key features:

- **Ventilated upper freezer:** Ensures efficient air circulation and quick cooling.
- **Static chest freezer at the bottom:** Provides reliable and even freezing of products.
- **LED lighting:** Illuminates the contents in an energy-efficient way.
- **Large capacity:** Offers ample space for a wide range of frozen products.

With this wall-mounted freezer unit, you'll add a practical and stylish solution to your store. Order today and keep your frozen products at the perfect temperature!




EAN code	7435137869818	Width (mm)	1454
Depth (mm)	890	Height (mm)	2110
Color	White	Parcel ready	No
Gross Weight (kg)	298	Particulars	Top ventilated cooling, bottom static cooling
Voltage (Volt)	230	Frequency (Hz)	50
Electrical power (kW)	1,15	Cooling agent	R 290
Temperature range (°C)	<-18	Number of dividers	2
Number of grids	4	Guides distance (mm)	90
Max. grid load (kg)	18	Gross Capacity (Ltr)	373 top / 575 bottom
Lights	Yes, LED	Type of cooling	Ventilated
Lockable	No	Mobile	No
Number of doors	2	Noise level (dB)	58 top / 61 bottom
Defrost	Automatic	Max. ambient temperature (°C)	25
Insulation thickness (mm)	60	Energy label	E
Power consumption (Kw/24h)	13,78 top / 6,93 bottom	Brand	COMBISTEEL
Refrigerant quantity (gr)	100+70	EPREL ID	635214
Plug and play (EU only)	Yes		



Combisteel

7455.2520

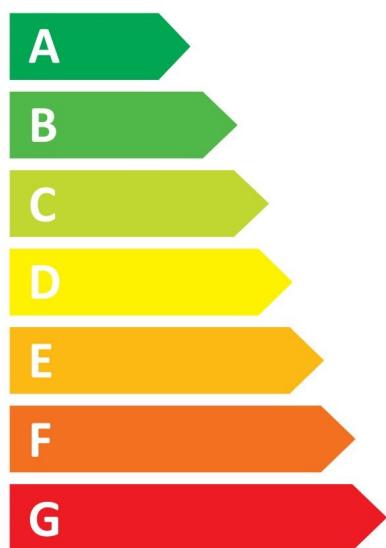

5030 kWh/annum



0.74 m²



2019/2018



Combisteel

7455.2645-1



2529 kWh/annum

0.75 m²

-17 °C
-23 °C

2019/2018

