

TEFCOLD®

COOL PRODUCTS WORLDWIDE



EXPRESS RANGE

*The new class leading range of
multidecks from TEFCOLD*

Chilled Open Front Multideck Express C Range

TEFCOLD 



EX250C

EX125C

Product Description

The TEFCOLD Express range has been designed as a quality refrigerated multideck, combining power and efficiency at a competitive price. The unit is supplied with horizontal LED lighting across the top to present products in an attractive environment. Shelves come with ticket strips and risers, they can be tilted to 10 or 20 degrees to give a more versatile display. Great for display of soft drinks, dairy, sandwiches and packed fresh meat, this product is ideal for supermarkets where plug-in refrigeration is required, convenience stores, food-to-go, delis, sandwich shops and butchers etc.

Features and Benefits

- Fully automatic, fan assisted cooling
- Horizontal LED Lighting
- Solid 40mm endwalls with mirrored interior
- Soft closing nightblind
- Adjustable 400mm deep shelves to maximise capacity
- Heavy duty shelving with strengthening bar
- Max shelf weight 130kg/m²
- Shelves can be flat or angled to 10° or 20°
- Electronic controller
- Ticket strips and shelf risers
- Suitable for fresh meat
- Adjustable feet
- Can be multiplexed with kit (POA)
- Castors available on 125 & 187 (factory options)
- Refrigeration unit can be serviced from the front

Technical Specifications

Temperature Range	-1/+5°C (3M1)
Refrigerant	R449a
Type of Defrost	Off Cycle
Exterior Finish	Anthracite Grey (RAL7016)
Interior Finish	Anthracite Grey (RAL7016) with mirror endwalls
Power Required	13 Amp (2x 13 amp on 187 and 250 sizes)
Max Ambient	25°C at 60% RH
Climate Class	3

Model	Description		Dimensions (mm)			Kg	kWh/Annum	Total Display Area	Total Shelf Area	Energy Rating
			H	W	D					
EX125C	Anthracite	Ext.	2010	1330	780+70*	267	10,147	1.6m ²	2.5m ²	A G
EX187C	Anthracite	Ext.	2010	1955	780+70*	355	13,103	2.4m ²	3.74m ²	A G
EX250C	Anthracite	Ext.	2010	2580	780+70*	511	14,089	3.2m ²	5.0m ²	A G

*Cabinet supplied with 70mm stand off to allow airflow to rear of unit. This must be fitted before final installation. Unit is 780 deep without standoff to allow it to fit through narrower doors.

TEFCOLD 



Nightblind for energy saving

Chilled Full Glass Door Multideck Express CD Range

TEFCOLD 



EX250CD

45% ENERGY SAVING OVER OPEN FRONT VERSION
(save approx £894 per year @ 14p per kWh)

MORE THAN 10% EXTRA SHELF SPACE COMPARED TO OPEN FRONT

EX125CD

52% ENERGY SAVING OVER OPEN FRONT VERSION
(save approx £746 per year @ 14p per kWh)

MORE THAN 10% EXTRA SHELF SPACE COMPARED TO OPEN FRONT


Special Installation


Site Survey


Suitable For Fresh Meat

Product Description




The Express CD has all the benefits of a quality multideck display from TEFCOLD but with the addition of double glazed hinged glass doors for added energy efficiency and between 45% and 56% savings on running costs compared to open front. For greater stock capacity these units come with 450mm deep shelves giving over 10% more storage capacity (compared to the open front version) to help maximise sales during busy periods and reduce restocking. The unit has excellent internal illumination with vertical LED lighting (2 on the EX125CD and 3 on the EX187CD and EX250CD) as well as LED lighting horizontally across the top. Shelves can be flat or tilted to 10 or 20 degrees with ticket strips and shelf risers provided. Great for display of soft drinks, dairy, sandwiches and packed fresh meat, this product is ideal for supermarkets where plug-in refrigeration is required, convenience stores, delis, sandwich shops and butchers etc.

Features and Benefits

- Hinged double glazed doors
- Fully automatic, fan assisted cooling
- Vertical & Horizontal LED Lighting (2 vertical LED lights on the EX125 and 3 vertical LED lights on the EX187 & EX250)
- Adjustable 450mm deep shelves to maximise capacity
- Heavy duty shelving with strengthening bar
- Max shelf weight 130kg/m²
- Shelves can be flat or angled to 10° or 20°
- Ticket strips and shelf risers
- Suitable for fresh meat
- Electronic controller
- Adjustable feet
- Solid 40mm endwalls
- Can be multiplexed with kit (POA)
- Castors available on 125 & 187 (factory options)
- Refrigeration unit can be serviced from the front

Technical Specifications

Temperature Range	-1/+5°C (3M1)
Refrigerant	R449a
Type of Defrost	Off Cycle
Exterior Finish	Anthracite Grey (RAL7016)
Interior Finish	Anthracite Grey (RAL7016)
Power Required	13 Amp
Max Ambient	25°C at 60% RH
Climate Class	3

Model	Description	Dimensions (mm)				Kg	kWh/Annum	Total Display Area	Total Shelf Area	Energy Rating
			H	W	D					
EX125CD	2 Door	Ext.	2010	1330	780+70*	301	4,818	1.46m ²	2.81m ²	A E 
EX187CD	3 Door	Ext.	2010	1955	780+70*	417	5,658	2.09m ²	4.21m ²	A D 
EX250CD	4 Door	Ext.	2010	2580	780+70*	511	7,702	2.92m ²	5.63m ²	A D 



*Cabinet supplied with 70mm stand off to allow airflow to rear of unit. This must be fitted before final installation. Unit is 780 deep without standoff to allow it to fit through narrower doors.



EX187CD

56% ENERGY SAVING OVER OPEN FRONT VERSION
(save approx £1,042 per year @ 14p per kWh)


MORE THAN 10% EXTRA SHELF SPACE COMPARED TO OPEN FRONT

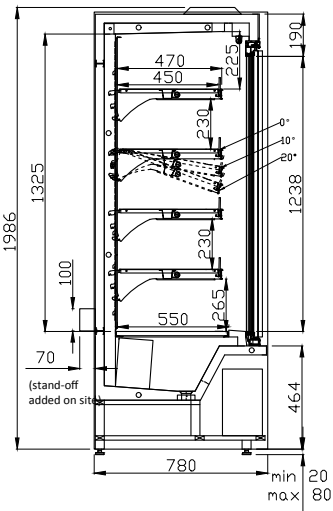

Shelves can be tilted for a more versatile display



Ticket strip and shelf risers supplied as standard

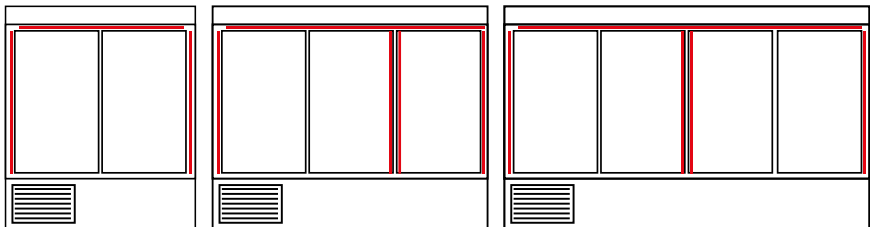

Red lines on diagrams show placement of LED lighting on EXPRESS CD Range

Chilled Open Front Multideck Express C-SS Stainless Range

TEFCOLD 



EX125C-SS



New Product



Special Installation



Site Survey



Suitable For Fresh Meat

Product Description

The TEFCOLD Express Stainless range is a quality refrigerated multideck combining power and efficiency, finished in high quality food grade brushed stainless steel with glass end-walls. The unit has excellent internal illumination with LED lighting vertically on both sides as well as horizontally across the top. The unit comes supplied as standard with stainless steel shelves that can be tilted to 10 or 20 degrees together with ticket strips and shelf risers provided. Great for display of soft drinks, dairy, sandwiches and packed fresh meat, this product is ideal for supermarkets where plug-in refrigeration is required, convenience stores, food to go, delis, sandwich shops and butchers etc.

Features and Benefits

- High quality 304 food grade stainless steel finish
- Double glazed glass end walls
- Fully automatic, fan assisted cooling
- Vertical & horizontal LED lighting
- Soft closing nightblind
- Adjustable 400mm deep shelves to maximise capacity
- Heavy duty stainless steel shelving with strengthening bar
- Max shelf weight 130kg/m²
- Shelves can be flat or angled to 10° or 20°
- Ticket strips and shelf risers
- Suitable for fresh meat
- Adjustable feet
- Electronic controller
- Can be multiplexed with kit (POA)
- Castors available on 125 & 187 (factory options)
- Refrigeration unit can be serviced from the front


Technical Specifications

Temperature Range	-1/+5°C (3M1)
Refrigerant	R449a
Type of Defrost	Off Cycle
Exterior Finish	304 Food Grade Brushed Stainless Steel
Interior Finish	304 Food Grade Brushed Stainless Steel
Power Required	13 Amp (2x 13 amp on 187 and 250 sizes)
Max Ambient	25°C at 60% RH
Climate Class	3

Model	Description		Dimensions (mm)			Kg	kWh/Annum	Total Display Area	Total Shelf Area	Energy Rating
			H	W	D					
EX125C-SS	Brushed Stainless	Ext.	2010	1330	780+70*	267	10,147	1.6m ²	2.5m ²	A G
EX187C-SS	Brushed Stainless	Ext.	2010	1955	780+70*	355	13,104	2.4m ²	3.74m ²	A G
EX250C-SS	Brushed Stainless	Ext.	2010	2580	780+70*	511	14,089	3.2m ²	5.0m ²	A G

*Cabinet supplied with 70mm stand off to allow airflow to rear of unit. This must be fitted before final installation. Unit is 780 deep without standoff to allow it to fit through narrower doors.

TEFCOLD 

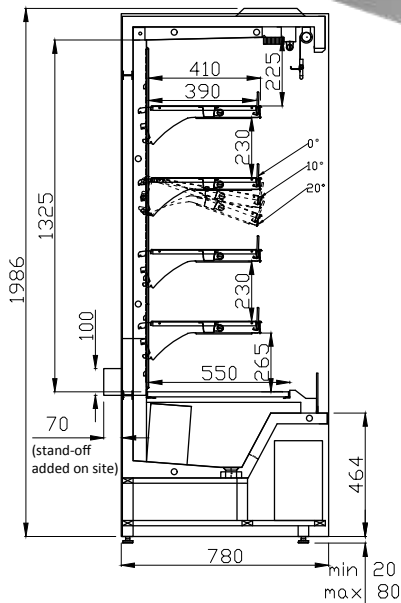

Ticket strip and shelf risers supplied as standard with glass end walls



Shelves can be tilted for a more versatile display



Nightblind for energy saving



Interlevin Refrigeration Ltd
West Meadow Rise | Castle Donington | Derby DE74 2NP | UK

T: +44 (0) 1332 850090 | E: trade.sales@interlevin.co.uk
interlevin.co.uk