The photo may show the standard model and not the configurated one

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ACP-3G HDD 230V 1N 50Hz

19089543 24/10/2023

DENOMINATION:

Refrigerated counter with drawers - Advance 700 Gastronorm with 3 compartments (2x1/2 and 2).

DESCRIPTION :

- Structure built with AISI-304 stainless steel
- 50 mm, 40 kg/m3 injected polyurethane insulation.
- Forced draught cooling system inside the room.
- Copper piping and aluminium flaps evaporator.
- Digital display for electronic and digital control of temperature and defrosting.
- The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.
- Easier loading and unloading thanks to its door self-closing and stay open features.
- Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).
- Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.
- Built-in drainage to get rid of waste liquids inside the unit.
- Interior LED lighting (only for models with glass doors).
- Embedded bottom and curved panels inside for easy cleaning and maintenance.
- Height adjustable stainless steel legs.
- 10 cm high splashback.
- Working temperature: from 0 ºC to +8 ºC (refrigerators) and from -18 ºC to -22 ºC (freezers).

Refrigerated counters with ""H"" drawers.
VERSATILITY: Different sets of drawers for the most specific requirements.
ROBUSTNESS: Our perforated stainless steel drawers can stand loads up to 40 kg.

POSSIBLE OPTIONS :

- 60 Hz
- Stainless Backing
- Wheels Kit (Factory Assembly)
- British plug
- Door frame resistance
- Granite worktop
- Left group
- Without breastplate
- Without Countertop
- Panoramic aperture
- Remote group

STANDARD OPTIONS :

- HACCP alarm

POSSIBLE ACCESSORIES :

- ACCESSORIES
- ACCESSORIES FOR REFRIGERATION
- GASTRONORM GRIDS

DIMENSIONS



X Width	1790 mm	X Gross width	1910 mm
Y Depth	700 mm	Y Gross depth	825 mm
Z Height	850 mm	Z Gross height	1000 mm
Net Weight	144,0 kg	Gross Weight	151,0 kg
Net volume	1,071 m3	Gross volume	1,576 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,160 kW
Amperage (A)	0,7 A
Voltage	230V - 1N
Electric frequency	50Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-600a

COLD TECHNICAL SPECIFICATIONS

Refrigeration power	0,360 kW
Annual elec. consumption	452,60 kWh
Power consumption 24h	1,24 kWh
Gross internal volume	446 L
Refrigeration net.vol	243 L
Climate class	5
Cooling gas load	110,000 g
Clasif. Energy efficiency	A
Energy Efficiency Index	18,80 %
Model Type	Counter Cabinet

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A

OTHERS

Number of doors	2
Noise level	54,00 dB
Condensation system	Vent.

The photo may show the standard model and not the configurated one

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ACP-3G HDD 230V 1N 50Hz

19089543 24/10/2023

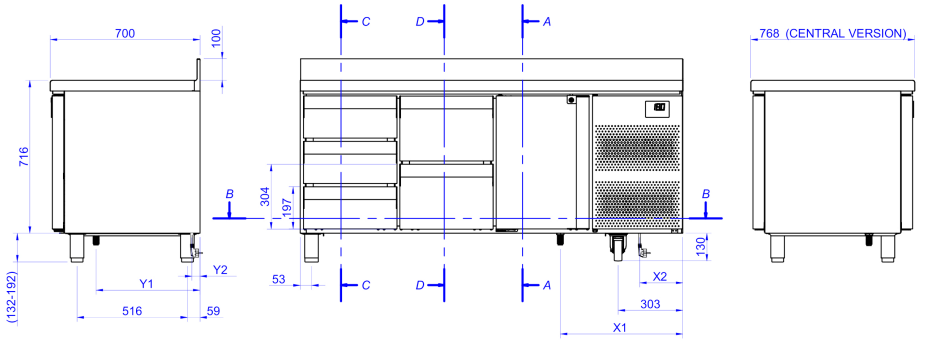

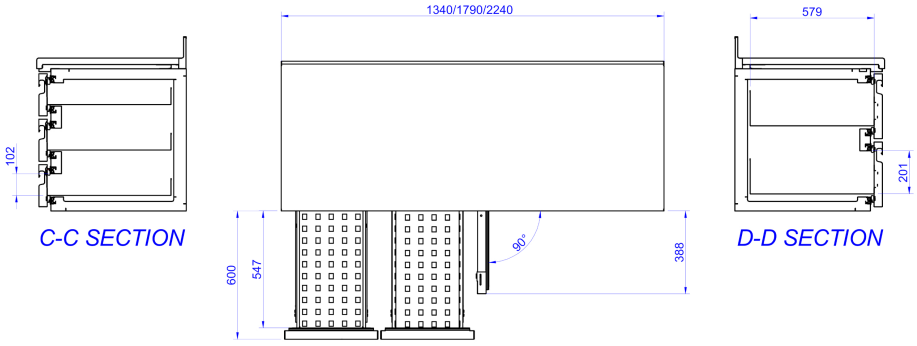

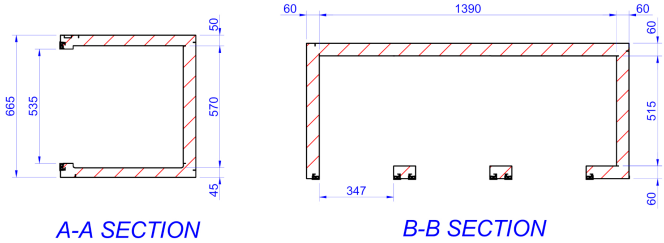

DRAIN	X1 (mm)	573
	Y1 (mm)	486
ELECT.	X2 (mm)	202
	Y2 (mm)	38