The photo may show the standard model and not the configurated one

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
AUP-22G LC 230V 1N 50Hz

19089396 23/10/2023

DENOMINATION:

Refrigerated cabinet - Advance Gastronorm with 2 compartments and 2 doors, at 50Hz.

DESCRIPTION :

- Interior and exterior completely built with AISI-304 stainless steel.
- 80 mm, 40 kg/m3 injected polyurethane insulation.
- Embedded inner tray slides. Storage trays at 24 different levels 55 mm from each other.
- Forced draught cooling system.
- Copper piping and aluminium flaps evaporator.
- HACCP system that keeps running logs.
- Digital display for electronic and digital control of temperature and defrosting.
- Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.
- Opened door delay alarm.
- Self-closing and stay open doors. When opened less than 90º they close by themselves. When opened more than 135º they stay open.
- Built-in drainage to get rid of waste liquids inside the unit.
- Embedded bottom and curved panels inside for easy cleaning and maintenance.
- Height adjustable stainless steel legs.
- Inner LED lights with power switch (now also in freezing units).
- Refrigerated cabinet.
- Working temperature: from 0 ºC to +8 ºC.

POSSIBLE OPTIONS :

- 60 Hz
- Stainless Backing
- Wheels Kit (Factory Assembly)
- British plug
- Door frame resistance
- Glass door
- Pedal
- Remote group

STANDARD OPTIONS :

- HACCP alarm
- Locks

POSSIBLE ACCESSORIES :

- ACCESSORIES
- GASTRONORM GRIDS

DIMENSIONS



X Width	1358 mm	X Gross width	1430 mm
Y Depth	856 mm	Y Gross depth	880 mm
Z Height	2106 mm	Z Gross height	2185 mm
Net Weight	227,0 kg	Gross Weight	240,0 kg
Net volume	2,371 m3	Gross volume	2,750 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,192 kW
Amperage (A)	0,87 A
Voltage	230V - 1N
Electric frequency	50Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-600a

COLD TECHNICAL SPECIFICATIONS

Refrigeration power	0,436 kW
Annual elec. consumption	832,20 kWh
Power consumption 24h	2,28 kWh
Gross internal volume	1332 L
Refrigeration net.vol	955 L
Climate class	5
Cooling gas load	103,000 g
Clasif. Energy efficiency	C
Energy Efficiency Index	38,20 %
Model Type	Vertical cabinet

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A

OTHERS

Noise level	53,00 dB
Condensation system	Vent.

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
AUP-22G LC 230V 1N 50Hz
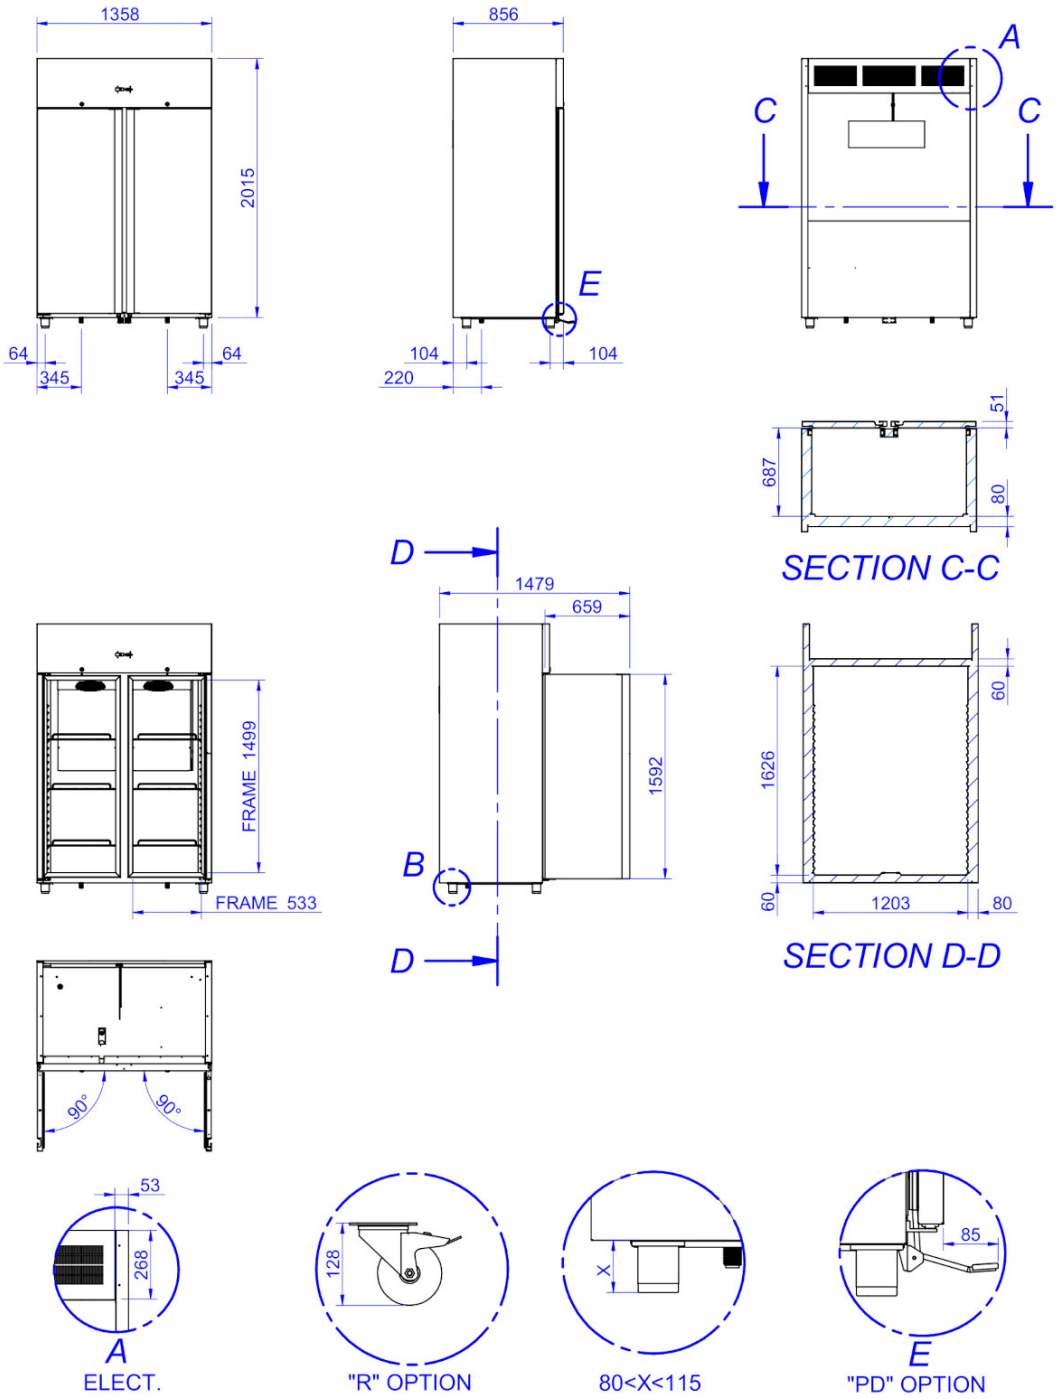
19089396 23/10/2023