The photo may show the standard model and not the configurated one

**Catalogue**
FOOD SERVICE
**Chapter**
REFRIGERATION

**Specific model**
AUN-11G LC 230V 1N 50Hz

19089398 23/10/2023

**DENOMINATION:**

Freezer cabinet - Advance Gastronorm with 1 door, at 50Hz.

**DESCRIPTION :**

- Interior and exterior completely built with AISI-304 stainless steel.
- 80 mm, 40 kg/m3 injected polyurethane insulation.
- Embedded inner tray slides. Storage trays at 24 different levels 55 mm from each other.
- Forced draught cooling system.
- Copper piping and aluminium flaps evaporator.
- HACCP system that keeps running logs.
- Digital display for electronic and digital control of temperature and defrosting.
- Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.
- Opened door delay alarm.
- Self-closing and stay open doors. When opened less than 90º they close by themselves. When opened more than 135º they stay open.
- Built-in drainage to get rid of waste liquids inside the unit.
- Embedded bottom and curved panels inside for easy cleaning and maintenance.
- Height adjustable stainless steel legs.
- Inner LED lights with power switch (now also in freezing units).
- Freezer cabinet.
- Working temperature: from -18 ºC to -22 ºC.

**POSSIBLE OPTIONS :**

- 60 Hz
- Stainless Backing
- Wheels Kit (Factory Assembly)
- British plug
- Opposite Opening
- Pedal

**STANDARD OPTIONS :**

- Door frame resistance
- HACCP alarm
- Locks

**POSSIBLE ACCESSORIES :**

- ACCESSORIES
- GASTRONORM GRIDS

**DIMENSIONS**




| | | | |
|---|---|---|---|
| X Width | 693 mm | X Gross width | 730 mm |
| Y Depth | 856 mm | Y Gross depth | 880 mm |
| Z Height | 2106 mm | Z Gross height | 2185 mm |
| Net Weight | 152,0 kg | Gross Weight | 160,0 kg |
| Net volume | 1,210 m3 | Gross volume | 1,404 m3 |

**ELECTRICITY TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Electric power | 0,471 kW |
| Amperage (A) | 3,5 A |
| Voltage | 230V - 1N |
| Electric frequency | 50Hz |

**GAS TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Gas type | R-290 |

**COLD TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Refrigeration power | 0,535 kW |
| Annual elec. consumption | 2752,10 kWh |
| Power consumption 24h | 7,54 kWh |
| Gross internal volume | 610 L |
| Frozen net.vol | 453 L |
| Climate class | 5 |
| Cooling gas load | 150,000 g |
| Clasif. Energy efficiency | D |
| Energy Efficiency Index | 74,30 % |
| Model Type | Vertical cabinet |

**CONNECTIONS TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Single-phase 230V wiring | 2X1+T-3A |

**OTHERS**

| | |
|---|---|
| Noise level | 58,00 dB |
| Condensation system | Vent. |

**Catalogue**
FOOD SERVICE
**Chapter**
REFRIGERATION

**Specific model**
AUN-11G LC 230V 1N 50Hz
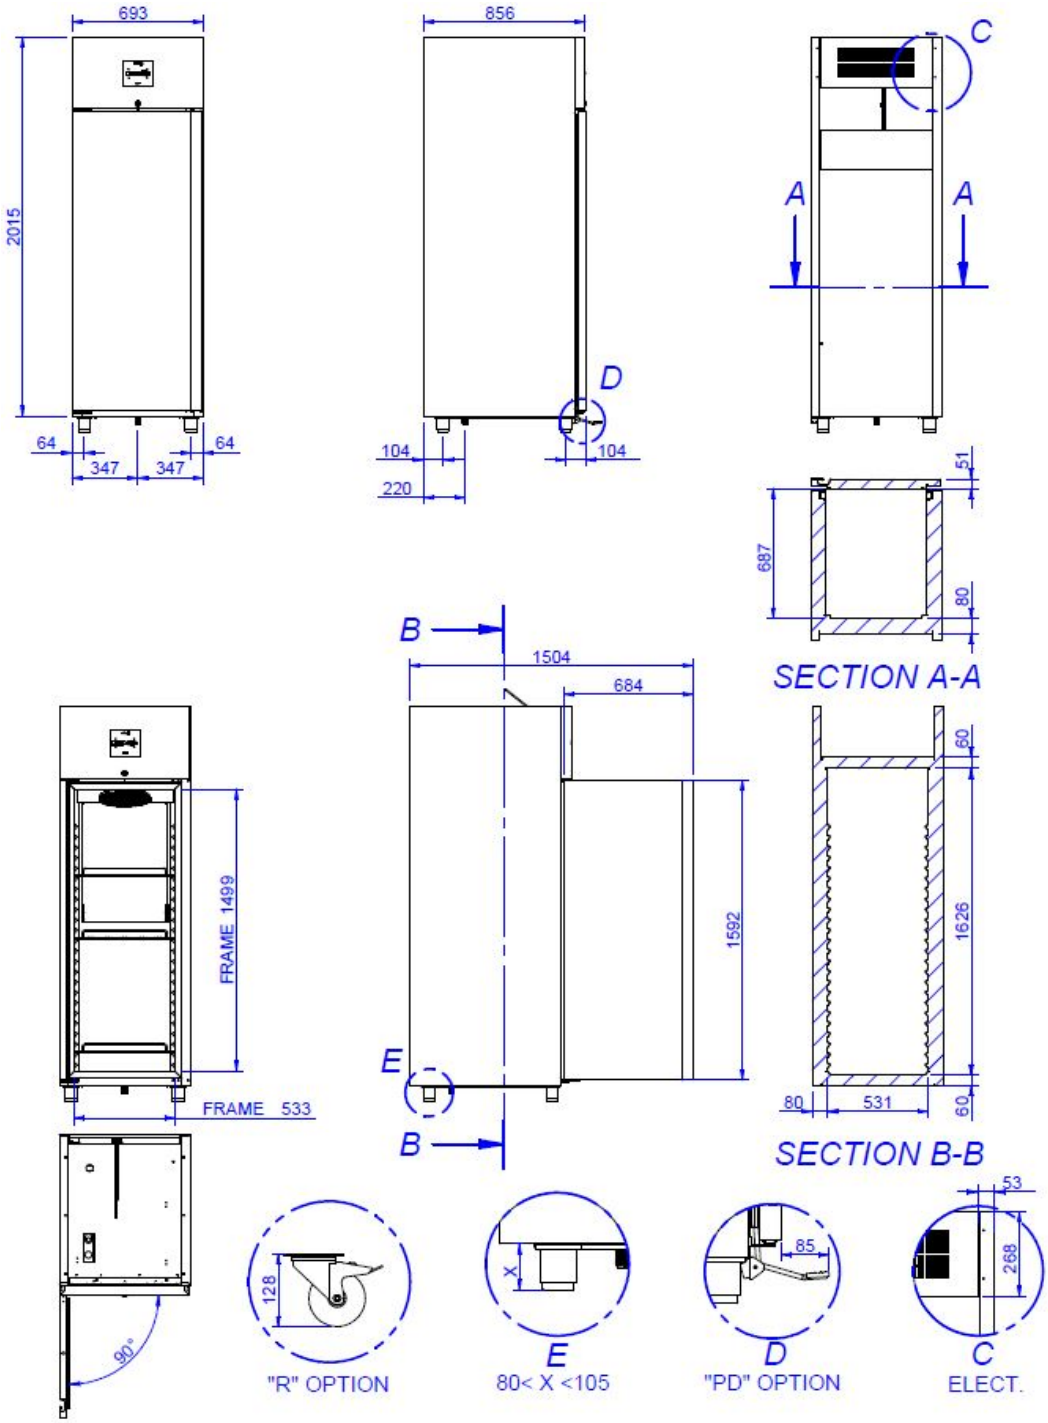
19089398 23/10/2023