



The Refrigeration Experts

## Product specification

---

### FMSLIM700NG: 253 Ltr Slim Multideck

18-143


Slimline 700mm multideck with night blind and glass end panels

#### **About the product**

Allowing the biggest capacity from the smallest possible footprint, the Slim Multideck displays your products beautifully.

Available to finance with our award-winning interest-free credit and leasing

Learn more about our Multideck range

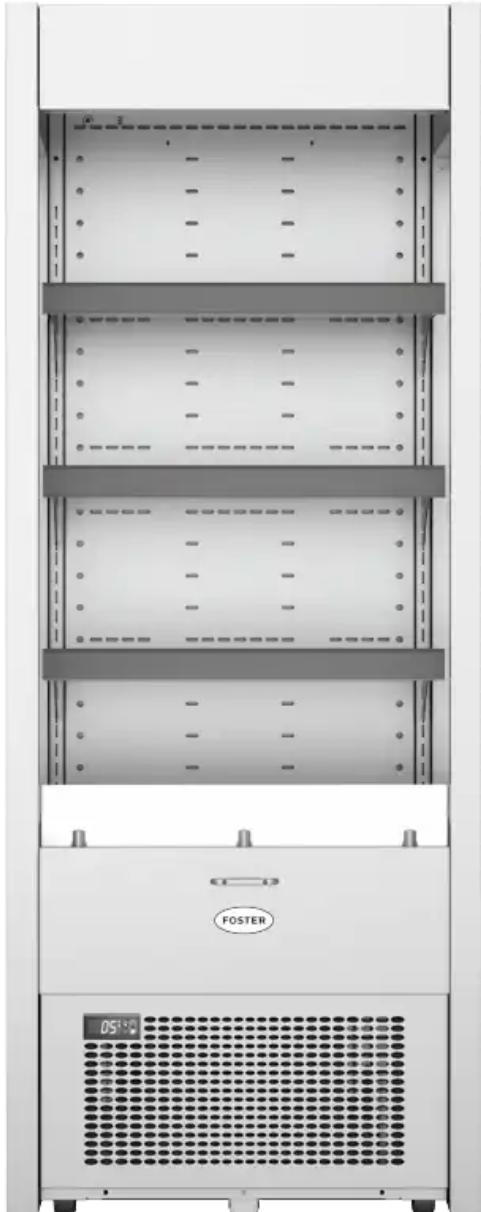

## Why choose this product

- Optimum storage and display from the smallest possible footprint
- Optional fully frameless doors can reduce energy consumption by up to 55%
- Energy saving LED lighting is brighter, lasts longer and saves you money
- Additional shelf depth (400mm) delivers increased volume compared to competitor slimline cabinets
- Extra wide glass end panels increase display visibility
- Add 60mm to depth for spacer if product is to be wall-sited (required for air circulation - detachable if not wall sited)
- 2x vertical side mounted full length LED lights. On average these last 10x longer than fluorescent lighting and emit a fraction of the heat output.
- Energy saving retracting 'Soft Closing Mechanism' Nightblind.
- Fully removable shelves and supports for ease of cleaning.
- Made of high quality food safe superior 'brushed' stainless steel finish for easy wipe-clean efficiency.
- Removable front cover and slide out condensing unit allows easy access for service, minimising down time. Also our After Sales Support is there when you need us: 2 years parts and labour warranty as standard.

## Specification

### Technical

		Dimensions
<b>Refrigerant</b>	R290	<b>Height (mm)</b> 1780
<b>Temperature</b>	Display -1/+7°C	<b>Width (mm)</b> 695
<b>Electrical supply</b>	230/50/1	<b>Depth (mm)</b> 680
<b>Fuse rating (A)</b>	10	<b>Gross volume (ltr)</b> 253
<b>Current (A)</b>	5	<b>Net volume (ltr)</b> 1.38
<b>Power (W)</b>	1050	<b>Leg type</b> Roller castors
<b>Refrigerant mass (g)</b>	150	<b>Gross weight (kg)</b> 146
<b>Thermal heat rejection (W)</b>	800	<b>Net weight (kg)</b> 138

### Build

		Energy
<b>Finish ext/int</b>	304 S/S & 304 S/S	<b>Climate Class</b> 3
<b>Section configuration</b>		<b>Energy grade</b> E
<b>System</b>	Integral	<b>EEI</b> 57.5
		<b>AEC (kWh)</b> 4876
		<b>GWP</b> 3
		<b>Min - max temperature (°C)</b> -1/7
		<b>Energy consumption (kWh/24hr)</b> 16.5

## Footnotes

- Allow 60mm spacer if product is wall-sited (required for air circulation).  
Spacers are detachable if product is not to be wall-sited
- Delivery to dealer premises/direct to site on route days free of charge.  
Delivery and installation to ground floor site as priced - see UK price list  
for conditions
- Performance complies with M2 classification as prescribed in EN23953-  
2:2005. M2 refers to product temperatures of no greater than +7°C and  
no lower than -1°C when loaded in accordance with the standard and  
recorded under test conditions.

Thank you for your interest in this product. We hope you now have everything you need to choose Foster,  
however if you have any further questions, please do not hesitate to contact us.

Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU  
+44 (0)1553 691122 | [sales@foster-gamko.com](mailto:sales@foster-gamko.com) | [www.fosterrefrigerator.com](http://www.fosterrefrigerator.com)

All images shown are for illustration purpose only. All images and photographs are not intended to be relied  
upon for, nor to form part of, any contract unless specifically incorporated in writing into the contract.  
Solely the dimensions and specifications incorporated in the quotation or purchase order confirmation  
shall be contractually binding.